
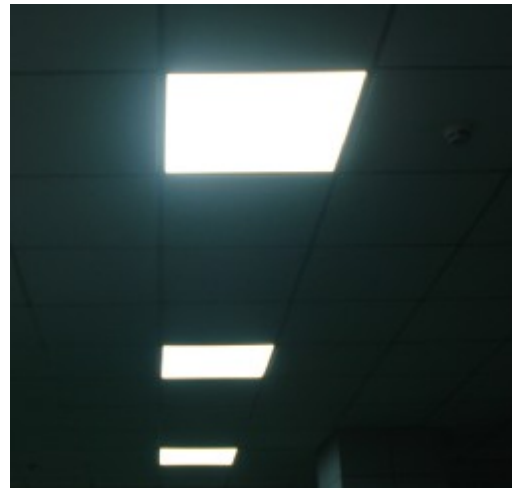



**Product: LED PANEL LIGHT**  
**Input Voltage: AC100V-240V / DC24V**  
**Dimensions: 298mm x 298mm x 14mm**

**Item No.: TP-18-W-3030-G**  
**Power Consumption: 18Watts**

### A. PHOTO AND DIMENSION (MM)

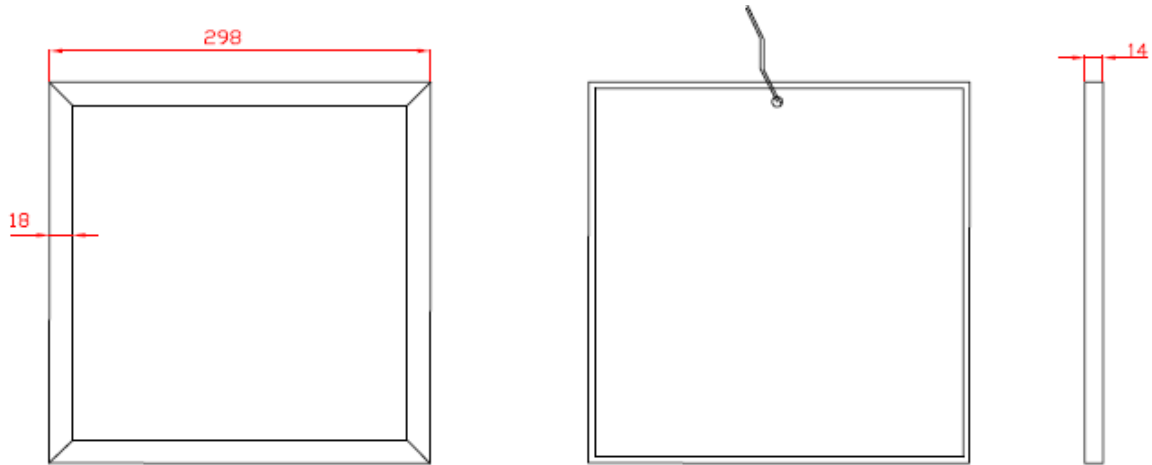

### B. INSTALLATION METHODS

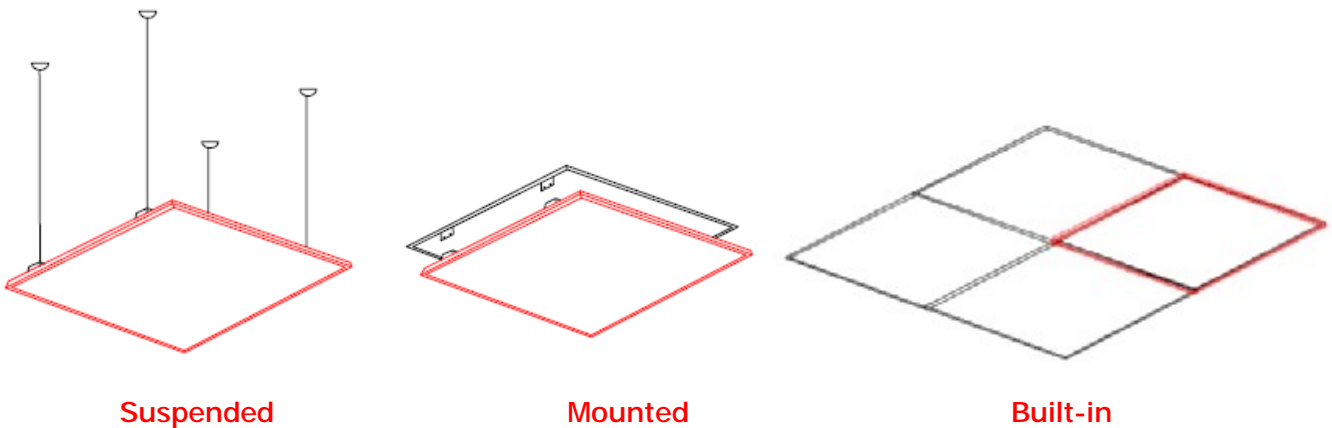


**LED LIGHT PANEL (TP-18-W-3030-G)**
**C. PARAMETERS**


ITEMS	PARAMETERS
Input Voltage	AC100-240V
Power consumption	18W
Luminous Flux	1100 Lm (Cold white), 1085 Lm (Natural white) 720 Lm (Warm white)
Luminosity (height @ 1 meter)	309 Lux (Cold white), 280 Lux (Natural white), 225 Lux (Warm white)
Color available	Cold white/Warm white/Natural white /Red /Green/Blue/Yellow/Orange/RGB
Life time	>50,000 hours
Operating Temperature	-10 °C to +40 °C
Storage Temperature	-20 °C to +60 °C
Humidity Operating	10-80%
Humidity Storage	10-80%
Weight	1.5KGS/PCS
Dimensions	300*300*14mm
IK Code	IK04
IP Code	IP41
Fixing Ways	In-built, Mounting, Suspending
Packing:	Inner Carton : 402*364*85 mm (2pcs/ctn) Outer Carton : 442*360*405 mm (8pcs/ctn)

**D. ILLUMINATION TEST AND LIGHT DISTRIBUTION GRAPH**

Item No. TP-18-W-3030-G		
Height (M)	Area $\Phi$ (M)	Illumination Intensity (Lux)
0.5	0.57	1128
1.0	1.09	309
1.5	1.73	134
2.0	2.30	78
2.5	2.88	54
3.0	3.46	40
Beam angle: 60 degree		Color: Cold White

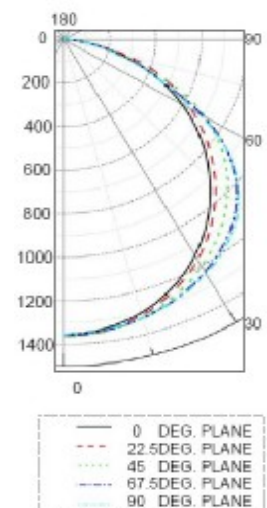

**E. PACKAGE**

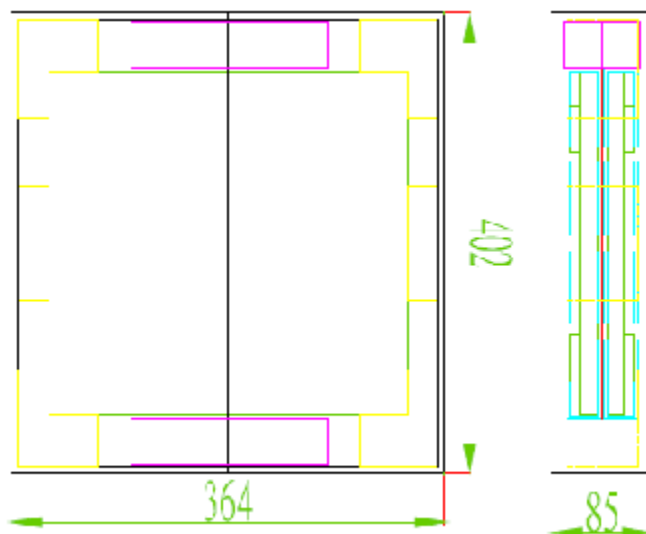

Shenzhen TheLEDLight Co., Ltd  
The LED Light (China) Co., Limited

Tel: +86-755-29652010

Fax: +86-755-29652015

<http://www.theledlight.com.cn>

<http://www.ledpanellights.com>

[sales@theledlight.com.cn](mailto:sales@theledlight.com.cn)

[sales@ledpanellights.com](mailto:sales@ledpanellights.com)

SHENZHEN, CHINA