
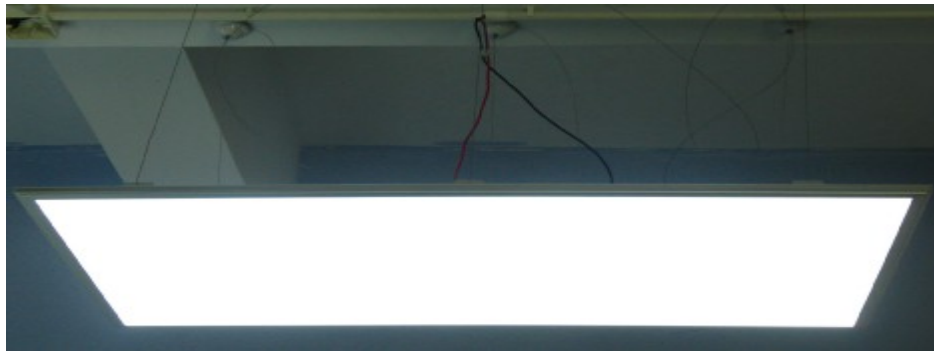
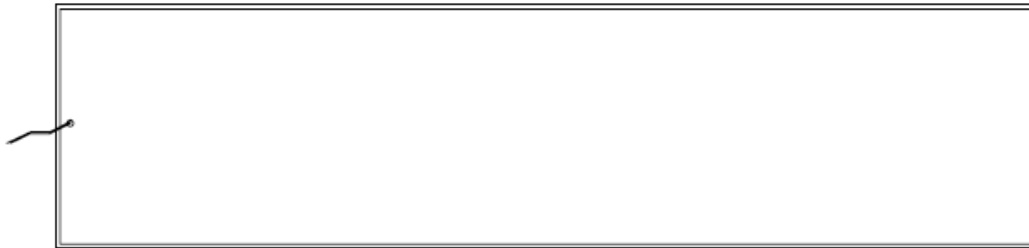



Product: LED PANEL LIGHT
Input Voltage: AC100V-240V / DC24V
Dimensions: 1198mm x 298mm x 14mm

Item No.: TP-39-W-3012-G
Power Consumption: 39Watts

A. PHOTO AND DIMENSION (MM)

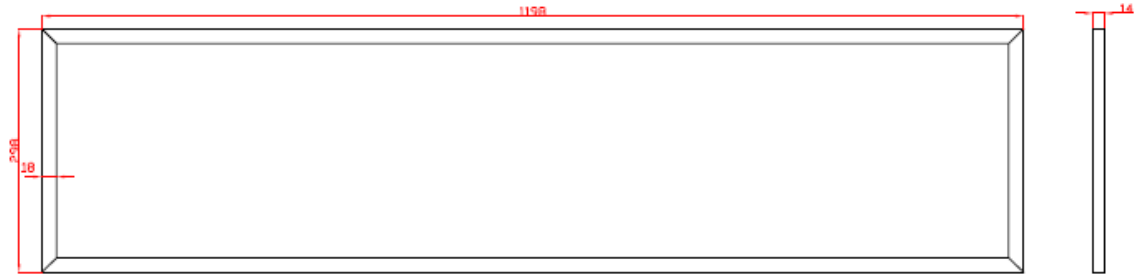

B. INSTALLATION METHODS

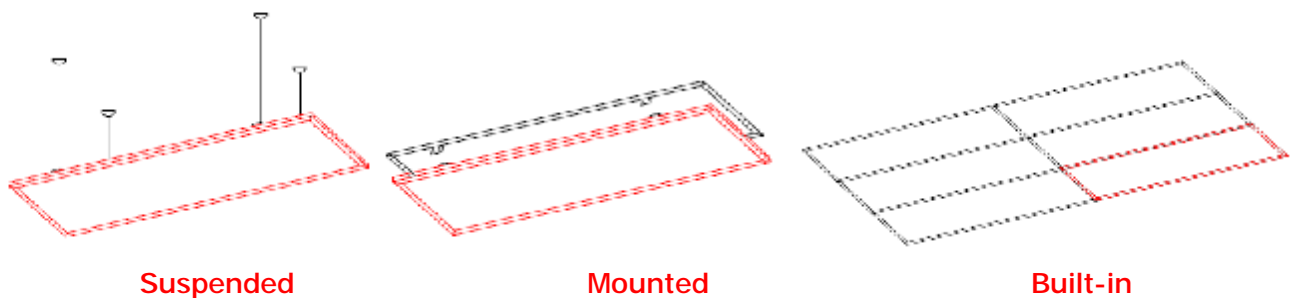


C. PARAMETERS


ITEMS	PARAMETERS
Input Voltage	AC100-240V
Power consumption	39W
Luminous Flux	2410 Lm(Cold white), 2394 Lm(Natural white), 1560 Lm(Warm white)
Luminosity (height @ 1 meter)	492 Lux (Cold white), 485 Lux (Natural white), 445 Lux (Warm white)
Color available	Cold white/Warm white/Natural white /Red /Green/Blue/Yellow/Orange/RGB
Life time	>50,000 hous
Operating Temperature	-10 °C to +40°C
Storage Temperature	-20 °C to +60°C
Humidity Operating	10-80%
Humidity Storage	10-80%
Weight	5.4KGS/PCS
Dimensions	1198*298*14mm
IK Code	IK04
IP Code	IP41
Fixing Ways	Built-in, Mounted, Suspended
Packing:	Inner Carton : 1302*364*85 mm (2pcs/ctn) Outer Carton : 1340*395*205 mm (4pcs/ctn)

D. ILLUMINATION TEST AND LIGHT DISTRIBUTION GRAPH

Item No. TP-39-W-3012-G		
Height (M)	Area Φ (M)	Illumination Intensity (Lux)
0.5	0.57	1290
1.0	1.09	492
1.5	1.73	252
2.0	2.30	150
2.5	2.88	97
3.0	3.46	72
Beam angle: 60 degree		Color: Cold White

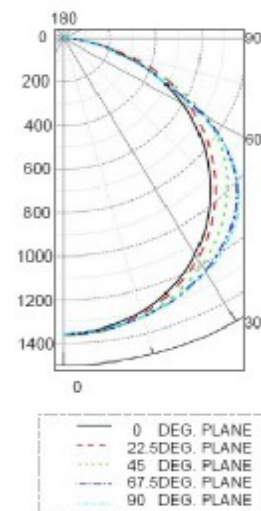

E. PACKAGE

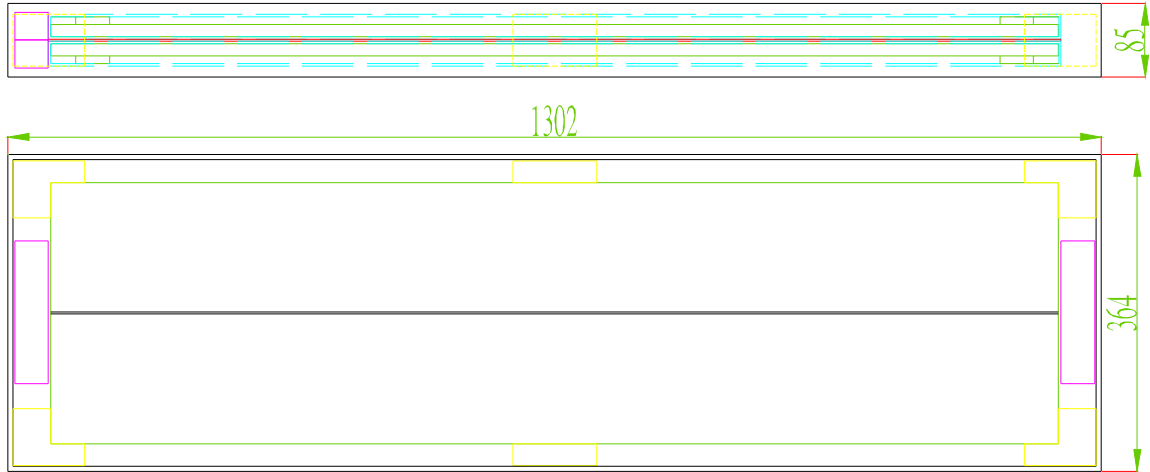

Shenzhen TheLEDLight Co., Ltd
The LED Light (China) Co., Limited

Tel: +86-755-29652010
Fax: +86-755-29652015

<http://www.theledlight.com.cn>
<http://www.ledpanellights.com>

sales@theledlight.com.cn
sales@ledpanellights.com

SHENZHEN. CHINA